




POPPY
Upholstery fabrics



3034



3236



3372



3443



3518



3554



4352



4372



4442




5245




5350



5431



5936



6236



6272




6444




6527



6562



6612

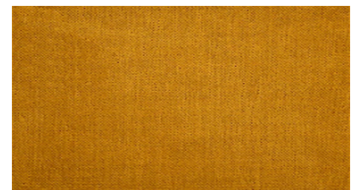

6635

POPPY

Upholstery fabrics

Breite: 150 cm
Gewicht: 355 G/M²
Material: Trevira CS 100%
Einlaufen: 2 %

Color fastness:
Against dry rubbing according to EN ISO 105-X12:
 - 4 (Scale 1-5)
Gegen Licht nach EN ISO 105-B02
 - 5-7 (Skala 1-8)
Against wet rubbing according to EN ISO 105-X12:
 - 3-4 (Scale 1-5)

Scheuerfestigkeit:
Martindale (Nach: EN ISO 12947-2):
 - 50000 Touren

Schwerentflammbarkeit:
 - EN 1021 part 1, 2- DIN 4102-1
 B1- IMO FTP Code 2010:
 - DIN 4102-1 B1
 - IMO FTP Code 2010: Part 8
 - NF P 92 503-507, M1
 - BS 5852 Crib 5
 - BS 5867-2 Type B
 - TB117 2013
 - EN 13501-1
 - NFPA 260

Wartungsanweisungen:




For further information:


Svensson
 511 82 Kinna, Sweden

T: +46 320 20 92 00
 F: +46 320 21 10 10
 E: info@ludvigsvensson.com





6642



6731



6733



6920



6932



6953



8200



8700



8800

POPPY

Upholstery fabrics

Breite: 150 cm
Gewicht: 355 G/M²
Material: Trevira CS 100%
Einlaufen: 2 %

Color fastness:
Against dry rubbing according to EN ISO 105-X12:
 - 4 (Scale 1-5)
Gegen Licht nach EN ISO 105-B02
 - 5-7 (Skala 1-8)
Against wet rubbing according to EN ISO 105-X12:
 - 3-4 (Scale 1-5)

Scheuerfestigkeit:
Martindale (Nach: EN ISO 12947-2):
 - 50000 Touren

Schwerentflammbarkeit:
 - EN 1021 part 1, 2- DIN 4102-1
 B1- IMO FTP Code 2010:
 - DIN 4102-1 B1
 - IMO FTP Code 2010: Part 8
 - NF P 92 503-507, M1
 - BS 5852 Crib 5
 - BS 5867-2 Type B
 - TB117 2013
 - EN 13501-1
 - NFPA 260

Wartungsanweisungen:



For further information:

Svensson
 511 82 Kinna, Sweden

T: +46 320 20 92 00
 F: +46 320 21 10 10
 E: info@ludvigsvensson.com

