




**TOPIC**  
Hanging fabrics


 **svensson**




8000




4030



8400

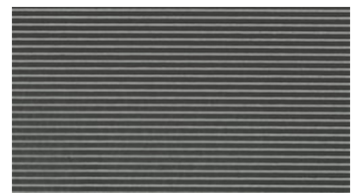

8500



7080



3220



8100



6710



6402



7030



4421




3611



4270




4362




5051




4653




3744



3427



6927

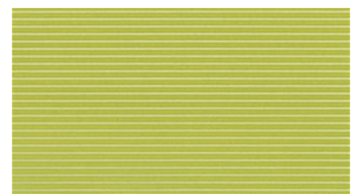

6335

## TOPIC Hanging fabrics

**Width:** 300 cm

**Weight:** 118 g/m<sup>2</sup>

**Material:** Trevira CS 100%

**Thickness:** 0.34 mm

**Color fastness:**

Against light according to EN ISO 105-B02

- 5-7 (Scale 1-8)

**Breaking strength:**

Warp (According to ISO 13934-1)  
120-150 N

Weft (According to ISO 13934-1)  
170-195 N

**Elongation to break:**

Warp (According to ISO 13934-1)  
36-54 %

Weft (According to ISO 13934-1)  
19-24 %

**Flame retardancy:**

- BS 5867:

- DIN 4102, B1

- EN 13773, Class 1

- IMO FTP Code Part 7

- NFP 92-503-507, M1

- EN 13501-1, B-s1, d0

- UNI 8456/8457

- BS 5867

- NFPA 701

**Care instructions:**



**For further information:**

Svensson  
511 82 Kinna, Sweden

T: +46 320 20 92 00

F: +46 320 21 10 10

E: [info@ludvigsvensson.com](mailto:info@ludvigsvensson.com)

